

"Light MORE
Pay LESS"



D'Mak Energia Pvt Ltd



LED Panel Lights

LED Conceal Panel Light

(RD/SQ) Aluminum Die Cast Body



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|----------|
| 4 | 2.5"x2.5" | WH/WW/NW |
| 8 | 4"x4" | WH/WW/NW |
| 15 | 6"x6" | WH/WW/NW |
| 22 | 8"x8" | WH/WW/NW |
| 30 | 11"x11" | WH |
| 40 | 24"x24" | WH |

LED Surface Panel Light

(RD/SQ) Aluminum Die Cast Body



| Watt | Colors |
|------|--------|
| 8 | WH/WW |
| 15 | WH/WW |
| 22 | WH/WW |
| 30 | WH |

LED PC Panel Light

(RD/SQ)



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|----------|
| 8 | 4"x4" | WH/WW/NW |
| 15 | 5"x5" | WH/WW/NW |
| 22 | 6"x6" | WH/WW/NW |

LED PC Panel Surface Ring

(RD/SQ)



| Size | Shape |
|-------|-------|
| 4"x4" | RD/SQ |
| 5"x5" | RD/SQ |
| 6"x6" | RD/SQ |

LED Conceal Trimless Light

(RD/SQ) Aluminum Die Cast Body



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|--------|
| 8 | 3"x3" | WH/NW |
| 15 | 5"x5" | WH/NW |
| 22 | 6"x6" | WH/NW |

LED Surface Trimless Light


(RD/SQ) Aluminum Die Cast Body



| Watt | Colors |
|------|--------|
| 8 | WH/NW |
| 15 | WH/NW |
| 22 | WH/NW |

LED Panel Lights

LED Color Conceal Panel Light (RD/SQ)



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|----------------------|
| 3+3 | 2.5"x2.5" | BL/PK/PGB/ RED/GR |
| 6+3 | 4"x4" | BL/PK/PGB |
| 12+4 | 6"x6" | BL/PK/PGB |

LED Color Surface Panel Light (RD/SQ)



| Watt | Colors |
|------|-----------|
| 3+3 | BL/PK/PGB |
| 6+3 | BL/PK/PGB |
| 12+4 | BL/PK/PGB |

LED Color Jelly Panel Light (RD/SQ)



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|-----------|
| 3+3 | 2.5"x2.5" | BL/PK/PGB |

LED Deep Down Light (RD/SQ) Aluminum Die Cast Body



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|--------|
| 12 | 4"x4" | WH/NW |
| 18 | 5"x5" | WH/NW |
| 24 | 6"x6" | WH/NW |

LED 3 in 1 Panel Light (RD/SQ) Aluminum Die Cast Body WH/WW/NW



| Watt | Cutout Size (Inch) |
|------|--------------------|
| 8 | 4"x4" |
| 15 | 6"x6" |
| 22 | 8"x8" |

LED 3 in 1 PC Panel Light (RD/SQ) WH/WW/NW



| Watt | Cutout Size (Inch) |
|------|--------------------|
| 8 | 4"x4" |
| 15 | 5"x5" |
| 22 | 6"x6" |

LED Lights

LED Wall Light

Body Colors (BK/WH)



| Watt | Colors |
|------|----------|
| 3 | WH/WW/NW |
| 6 | WH/WW/NW |
| 9 | WH/WW/NW |
| 16 | WH/WW/NW |
| 30 | WH/WW/NW |
| 50 | WH/WW/NW |

LED Track Light

Body Colors (BK/WH)



| Watt | Colors |
|-------------|-----------|
| 9 | WH/WW/NW |
| 16 | WH/WW/NW |
| 30 | WH/WW/NW |
| 50 | WH/WW/NW |
| Track Patti | 1 M 2 M |

LED Garden Light



| Watt | Colors |
|------|---------------------|
| 3 | WH/WW/BL/RED/GR |
| 5 | WH/WW/BL/RED/GR/RGB |
| 9 | WW/BL/RED/GR |
| 12 | WW |

LED Mirror Light

Shape (SLIM/CURVE)



| Watt | Colors |
|------|--------|
| 6 | WH/WW |
| 12 | WH/WW |

Borderless Adjustable Light



| Watt | Colors |
|------|-------------------|
| 10 | WH/WW/NW/ 3in1 |
| 15 | WH/WW/NW/ 3in1 |
| 22 | WH/WW/NW/ 3in1 |

Borderless Surface Ring



| Watt | Ring Color |
|----------|------------|
| 10/15/22 | WH |

LED COB Lights

LED Button Lights



| Watt | Body Colors | Colors |
|------|-------------|------------------------|
| 1 | WH | WH/WW/BL/ PK/RED/GR |
| 3 | WH | WH/WW/BL/ PK/RED/GR |
| 3 | BK/WOODEN | WW |

LED Rose Gold Button Light



| Watt | Color |
|------|-------|
| 1 | WW |
| 3 | WW |

LED D'MAK COB Light



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|-----------------------------|
| 3 | 2"x2" | WH/WW/BL/PK/ GR/3IN1/RGB |
| 6 | 2.5"x2.5" | WH/WW/BL/ PK/GR |
| 9 | 3.5"x3.5" | WH/WW |

LED Aluminium COB Light



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|----------|
| 3 | 2"x2" | WH/WW/NW |
| 6 | 2.5"x2.5" | WH/WW/NW |
| 9 | 2.5"x2.5" | WH/WW/NW |
| 16 | 3.5"x3.5" | WH/WW/NW |
| 30 | 5"x5" | WH/WW/NW |
| 50 | 6"x6" | WH/WW/NW |

LED Deep COB Light

Body Colors (BK/WH)



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|----------|
| 7 | 2"x2" | WH/WW/NW |
| 12 | 2.5"x2.5" | WH/WW/NW |
| 18 | 3"x3" | WH/WW/NW |

LED Rose Gold COB Light



| Watt | Cutout Size (Inch) | Colors |
|------|--------------------|--------|
| 5 | 2"x2" | WW/NW |
| 12 | 2.5"x2.5" | WW/NW |
| 18 | 3.5"x3.5" | WW/NW |

LED Lights

LED Rope Light




| Model | Colors |
|-------|-----------------------------------|
| 3014 | WH/WW/BL/PK/RED/GR/RGB |
| 2835 | WH/WW/BL/PK/RED/GR/Amber/Ice Blue |
| 5730 | WH/WW/BL/PK/RED/GR |
| 5050 | 16 Color RGB |

LED Rope Cord



| Model |
|----------|
| 3014 |
| 2835 |
| 5730 |
| 5050 |
| 2835 RGB |

LED Strip Light (5 METER)



| Model | Colors |
|-------------|--------------------------------------|
| 2835 - 120L | WH/WW/NW/BL/PK/RED/GR/Amber/Ice Blue |
| 2835 - 240L | WH/WW/NW/BL/RED/GR |

SMPS LED Strip Light Driver



| SMPS | AMP |
|------|-------|
| SMPS | 2A |
| SMPS | 3A |
| SMPS | 5A |
| SMPS | 10A |
| SMPS | 15A |
| SMPS | 20A |
| SMPS | 25A |
| SMPS | 33.3A |

Waterproof LED Strip Light Driver



| WP | AMP |
|-----|-----|
| WP | 2A |
| WP | 3A |
| WP | 5A |
| WP | 10A |
| NWP | 1A |

LED Tube Light



| Watt | Colors | Length |
|------|--------------------|--------|
| 5 | WH/WW/BL/PK/RED/GR | 1FT |
| 10 | WH/WW/BL/PK/RED/GR | 2FT |
| 20 | WH | 4FT |

LED Lights

LED Study Lamp Light

Body Colors (BK/WH)



| Watt | Colors |
|------|--------|
| 3 | WW/WH |

LED Ceiling Cylinder Light



| Watt | Colors |
|------|--------|
| 3 | WW/NW |
| 6 | WW/NW |
| 12 | WW/NW |
| 18 | WW/NW |

LED Junction Light



| Watt | Colors |
|------|---------------------------------|
| 3 | WH/WW/BL/PK/ RED/GR/3in1/RGB |
| 7 | WH/WW/BL/PK/ RED/GR/3in1/RGB |

LED Wall Cylinder Light



| Watt | Color |
|------|-------|
| 5 | WW |
| 10 | WW |

LED K Light



| Watt | Color |
|------|-------|
| 5 | WW |
| 10 | WW |

LED Foot Light

Type (Conceal/Surface)



| Module | Color |
|--------|-------|
| 1 M | WW |
| 2 M | WW |
| 3 M | WW |
| 4 M | WW |

LED Lights

LED Surface COB Light

Body Colors (BK/WH/WOODEN)



| Watt | Color |
|------|-------|
| 3 | WW |

LED Striker Light



| Watt | Colors |
|------|------------------------|
| 3 | WH/WW/BL/PK/ RED/GR |

LED Bulkhead Light



| Watt | Colors |
|------|--------|
| 9 | WH/WW |
| 18 | WH/WW |

LED Rimless Surface COB



| Watt | Colors |
|------|--------|
| 12 | WH/NW |
| 18 | WH/NW |

Linear COB Light



| Model | Colors |
|--------|--------|
| 1 EYE | WH/NW |
| 2 EYE | WH/NW |
| 3 EYE | WH/NW |
| 5 EYE | WH/NW |
| 10 EYE | WH/NW |

LED Profile Patti

Type (Conceal / Surface)



| Size | Length |
|------|---------|
| 17MM | 2 Meter |
| 25MM | 2 Meter |
| 35MM | 2 Meter |

LED Cabinet Light



| Size | Colors |
|------|----------|
| 1FT | WH/WW/NW |
| 2FT | WH/WW/NW |
| 3FT | WH/WW/NW |
| 4FT | WH/WW/NW |



Outdoor Lights

LED Street Light Glass Model



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_SLG_18W | 18W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_24W | 24W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_30W | 30W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_36W | 36W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_72W | 72W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Toughened glass cover
- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030/2835 LED as per requirement
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Street Light Glass Model



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_SLG_18W | 18W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_24W | 24W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_30W | 30W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_36W | 36W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_72W | 72W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLG_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Toughened glass cover
- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030/2835 LED as per requirement
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Street Light Lens Model



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_SLL_24W | 24W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLL_36W | 36W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLL_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLL_72W | 72W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLL_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLL_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Polycarbonate lens cover for the better light distribution
- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030/ 2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Street Light With 5050 High Power LED



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_SLP_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLP_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLP_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLP_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- >160-170 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 5050 Highpower led
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Street Light With 5050 High Power LED & Lens



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|----------------|---------|--------------|-------------------|
| DMAK_SLPL_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLPL_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLPL_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLPL_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP65 Drivers (isolated)
- > 160-170 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 5050 led
- Secondary optical lens for better light distribution & glass cover
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Street Light Leaf Model



| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|----------------|---------|--------------|-------------------|
| DMAK_SLLF_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLLF_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_SLLF_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |

Technical Specifications

- Toughened glass cover
- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- >120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030/2835 LED as per requirement
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Outdoor Lights

LED Solar Street Light All In One



| Product Code | Wattage | CCT(K) |
|--------------|---------|--------------|
| DMAK_SLS_20W | 20W | 6000K- 6500K |
| DMAK_SLS_40W | 40W | 6000K- 6500K |
| DMAK_SLS_60W | 60W | 6000K- 6500K |

Technical Specifications

- Body Material-ABS
- Charging time: 6-8 hours
- Lighting duration: 12-15 hours of sustainable lighting
- Battery type: lithium iron hydrochloride battery
- Product configuration: radar + remote control(available on some models)
- Radar sensor: 100% brightness when people come, 30% brightness when people leave.



Applications



Streets



High Way



Petrol Pump



Railway Station



Parking



Colonies



Factory



Farm House



Outdoor Lights

LED Flood Light Down-Chawk

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_FLF_30W | 30W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_350W | 350W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLF_400W | 400W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP65 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Warehouse



Outdoor Lights

LED Lens Flood Light

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_FLL_30W | 30W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_350W | 350W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLL_400W | 400W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP65 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years
- Polycarbonate lens cover for the better light distribution



Applications



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Warehouse



Outdoor Lights

LED Flood Light Back-Chawk

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_FLB_30W | 30W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_400W | 400W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_500W | 500W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLB_600W | 600W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP65 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Stadium



Garden



Functions



Outdoor Lights

LED Flood Light Back-Chawk With High Power LED

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_FLP_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLP_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLP_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLP_400W | 400W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLP_500W | 500W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLP_600W | 600W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 160-170 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 5050 led
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Cricket Stadium



Football ground

Outdoor Lights




LED Flood Light Back-Chawk With 5050 Power LED & Lens

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|----------------|---------|--------------|-------------------|
| DMAK_FLPL_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLPL_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLPL_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLPL_400W | 400W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLPL_500W | 500W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_FLPL_600W | 600W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 160-170 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 5050 led
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years
- Secondary optical lens for better light distribution with glass cover

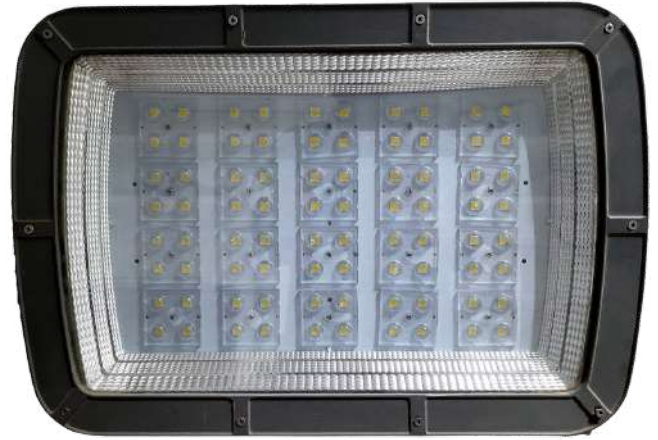

Applications



Petrol Pump



Railway Station



Parking



Colonies



Airport



Factory



Stadium



Outdoor Lights

LED Flood Light Duos

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|---------------------|-------------------|
| DMAK_FLD_150W | 150W | 3000K/ 4500k/ 6500K | AC 85-300V@ 50Hz |
| DMAK_FLD_200W | 200W | 3000K/ 4500k/ 6500K | AC 85-300V@ 50Hz |



IS 10322 (PART 5/ SECTOR 3) :2012



R- 72005894

Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Color changing - White/ Warm white/ Natural white on switching operation



Applications



Pavilion



Party Plot



Outdoor Lights

LED High Bay Light

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|---------------|---------|--------------|-------------------|
| DMAK_HBL_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_80W | 80W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_150W | 150W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_200W | 200W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_250W | 250W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_HBL_300W | 300W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP65 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Warehouse



Factory



Shed



Outdoor Lights

LED Well Glass Light

| Product Code | Wattage | CCT(K) | I/P Voltage Range |
|--------------|---------|--------------|-------------------|
| DMAK_WG_50W | 50W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_WG_80W | 80W | 3000K- 6500K | AC 85-300V@ 50Hz |
| DMAK_WG_100W | 100W | 3000K- 6500K | AC 85-300V@ 50Hz |



Technical Specifications

- Aluminum Die-cast body
- Internal Surge protection Up to 6kV
- External Surge protection 10KV as per requirement
- IP66 Drivers (isolated)
- > 120-140 Lumens/watt
- Higher volt Auto Cutoff
- OSRAM / DMAK LED 3030-2835 LED
- Operating Temperature -10° to 50°
- Average Life- 50000 Working Hours
- Warranty 2 years



Applications



Warehouse



Factory



Shed




Empowering Your World



- 📍 D'Mak Energia, B-123, GIDC, Electronics Zone, Sector-25, Gandhinagar, Gujarat - 382024
- ☎ 7096015306, 9426828423
- ✉ dixitpatel@dmakgroup.com, marketing@dmakgroup.com
- 🌐 www.dmakenergia.com, E-commerce : <https://dmakindia.com>

Jaleshwar
8780491768

Electrical Control Panel | LED Lights | Wires and Cables

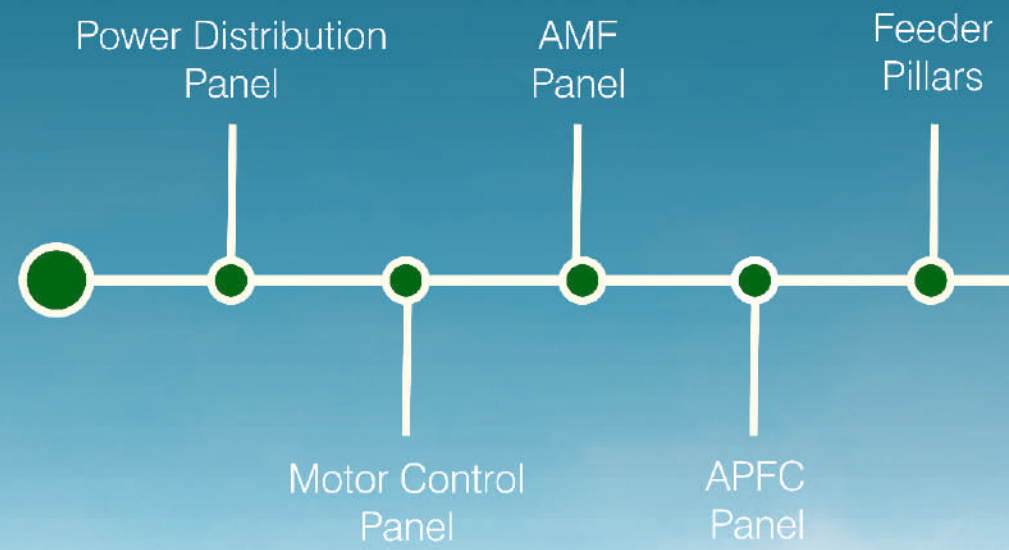

COMPANY PROFILE

Established in 21st Century, D'MAK Group has highly qualified professionals who had adopted best technologies. we have exemplified engineers and designers who will help you to personalize your project to meet your specific needs. Our years of valuable experience will also assist in budgeting the cost of your construction to assure the affordability of the project. through our network of offices. D'MAK Energia can offer a cost efficient solution to meet not only your project budget but also your schedule. In the end, you are assured of achieving the greatest value in your project.

The team at D'MAK Group firmly believes that your successful project is the true measure of our success.

PCC Panel

MCC Panel

AMF Panel

APFC Panel

Feeder Pillars

LED Lights

WIRE & CABLE

Turnkey Projects

Power Distribution Panel

Power Distribution Panel

- ⊗ Customised Design
- ⊗ upto IP 65 Protection for Enclosure
- ⊗ Application : Indoor
Outdoor
- ⊗ Floor Mounted
- ⊗ Stand Mounted
- ⊗ Rated Voltage 415V
- ⊗ Rated frequency 50HZ
- ⊗ Rated Normal Current - 4000Amper
- ⊗ Rated Short time with stand Current
- ⊗ Rated duration of short circuit in second 1

Application/Usage

These type of panels mainly used of main LT panel of anybuildings or factory area.

Overall plant Electricity monitoring can be done with these of panel



Motor Control Panel

Motor Control Panel

- ⊗ Customised Design
- ⊗ upto IP 65 Protection for Enclosure
- ⊗ Application : 1) Motor Starter, 2) DOL Starter,
3) S/D Starter, 4) Commutation Capable,
- ⊗ Floor Mounted
- ⊗ Stand Mounted
- ⊗ Rated Voltage 415V
- ⊗ Rated frequency 50HZ
- ⊗ Rated Normal Current - 2000Amper
- ⊗ Rated Short time with stand Current 2.5
- ⊗ Rated duration of short circuit in second 1

Application/Usage

These type of panels mainly use for large qty of motor protections.

Number of starters can be accommodate in single panel & can be monitored and operate remotely.



AMF Panel | APFC Panel

AMF Panel

- ⊙ Automatically start the Generator when mains power fails & stops the Generator when power resume
- ⊙ Available for 5 - 250 KVA Rating
- ⊙ 3 - Phase
- ⊙ Contactor type panel
- ⊙ Ambient Air Temperature < 50 °C
- ⊙ Power Consumption < 3 w

Application:

Auto mains failure panels are used for automatic DG starting when GEB supply gets off, this panel would give command to DG & it would start automatically




APFC Panel

- ⊙ Power Factor upto 0.95 to 0.99
- ⊙ Customised design step used

Application:

APFC Panels are used for improving of power factors
As per Govt. norms each factory / Building should have PF > 0.90. The same can be maintained & improved with this panels

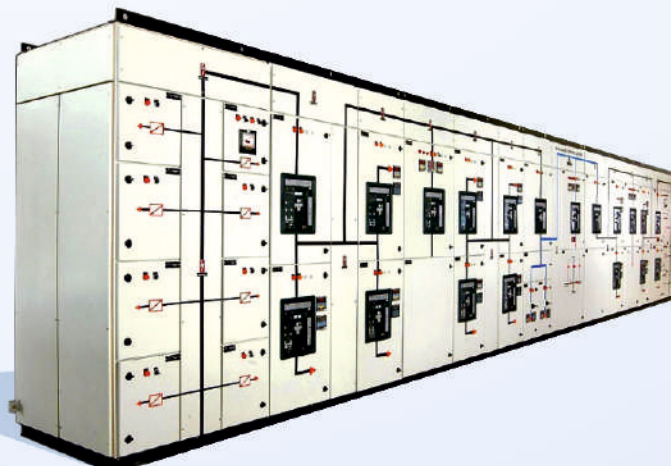

Feeder Pillar Panel

Feeder Pillar Panel

- ⊙ Outdoor panel
- ⊙ Enclosure thickness 2.5 mm
- ⊙ Customized Design 4 way, 6 way etc.


Application:

Outdoor panel requirements can be full filled by feeder pillars. apartments & outdoor distribution can be catered with this panels.



Automatic Change Over Panel

- ⊙ Instant automatic changes over from the main supply to generator supply & vice versa
- ⊙ Operate in low Voltage
- ⊙ Fuel is saved due to auto stop facility

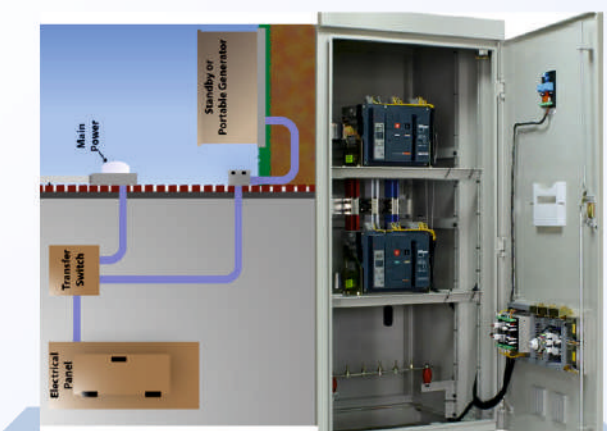

LED Lights

- ⊗ LED Conceal Panel Light
- ⊗ LED Surface Panel Light
- ⊗ LED Color Panel Light
- ⊗ LED Decorative Light
- ⊗ LED Street Light
- ⊗ LED Flood Light
- ⊗ LED Driver
- ⊗ O LED Highbay light
- ⊗ Wires & Cables
- ⊗ Meter Core PCB



Sheet / Metal Fabrication

We are engaged in manufacturing, supplying and exporting of perfect panel system Floor Standing Enclosures or racks that are manufactured using stainless steel, aluminum sheets, CRC sheets and other material. These fulfill the requirements of our clients with their flexible designing, which provides the following features :

- ⊗ Universal versatility applications
- ⊗ Superior functionality
- ⊗ Fully usable space
- ⊗ Maximum installation areas
- ⊗ Quick assemblage
- ⊗ Easy operation



